



## ROUND (Solid Color) PUSHBUTTON INSTALLATION




separate sheet available for RECTANGULAR pushbuttons

### DISASSEMBLY

- ¥ pry tab 'A' away from switch body and rotate switch body upwards around tab 'B'
- ¥ switch assembly will dislocate from tab 'B'
- ¥ squeeze plunger tabs on inside of barrel assembly together and push out of front of barrel

### MOUNTING

- ¥ Drill panel to 1-1/8" (max material 3/4" thickness)
- ¥ Insert barrel assembly with plunger installed
- ¥ Install barrel nut and tighten securely
- ¥ Install switch body by first aligning lug on tab 'B', then rotate down and fit to lug on tab 'A'
- ¥ complete wiring connections using appropriate connector (twisting wires around terminals is NOT an appropriate connector!!!)
- ¥ normally connections will be made to the COM (common) and N.O. (normally open) terminals

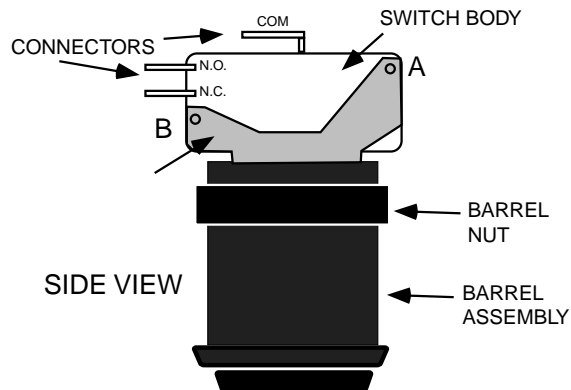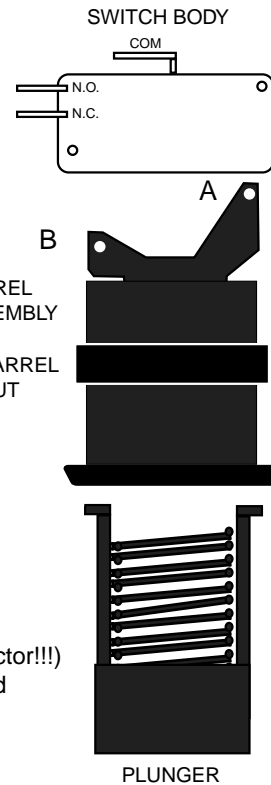

Stop and Listen Inc  
3928 Edmonton Trail NE Calgary, Alberta, Canada T2E-3P6 ph 403 276-5905